



EP-RS232-PRO LED CONTROLLER

EPIC'S PRO RS232 CONTROLLER

THE MOST POWERFUL IN THE MARKET TODAY

The EP-RS232-PRO LED Controller is a highly professional and intelligent system to control common anode LED lighting or incandescent light bulbs via 2-way RS232 serial commands. The EP-RS232-PRO provides 4 high current channels to create light scenes. The controller can also operate in a standalone mode which includes pre-programmed light sequences. This LED controller is ideal used for flexible ThinGlow™ LED strips.

KEY FEATURES

- 4 high current channels with independent control - The highest in the market. .RGB+White.
- Suitable for common anode RGB LED strips, LEDs and incandescent bulbs.
- Standalone mode with 8 preprogrammed light sequences.
- Custom user-editable sequence via RS232.
- Wide-range effect speed adjust.
- Wide-range of external input accessories such IPAD, relays, and wireless transmitter.
- Complete lists of color and scene serial commands to save programming time.
- Memory for last selected sequence and user-editable sequence.
- Serial TTL interface to control from your microcontroller or PC - interface sold separately.
- Addressable. Multiple modules can be connected with independent control for each module.
- Small form factor (AI sending sizes).
- PWM of 480 Hz to deliver smooth dimming and a wide range of color spectrum of LED light fixtures.
- Override memory feature that allows last program to continue even in an event whereby the RS232 is disrupted for any reason.
- Reverse polarity protection.
- Proprietary power conditioning design to work with magnetic transformers.



EPIC™ RS232 SERIAL CONTROLLER

BEYOND THE LIMITS!

SPECIFICATIONS

Power Requirement	External power supply - (power supply sold separately)
Operating Voltage:	Input: 8-24V DC Output: 8-24V DC (depends on input)
Channel Current:	5A@12V DC Per Channel 10A@24V DC Per Channel
LED intensity control:	255 intensity levels/channel
Communication Interface:	Serial RS232 9600 baud, 8 data bits, 1 stop bit, no parity, no handshaking, and no flow control
Dimension:	3.5" x 5" x 1.75" in
Weight:	2.5 lbs

CONTROL & INDICATORS

Power:	Blue LED on board/logo,
RGB Speed:	Blue LED on board/logo
R-G-B output:	RGB LED on board
White Output:	White LED on board

ENCLOSURE

- Black anodized aluminum with laser engraving
- Logo - optical grade acrylic with LEDs

CONNECTORS

- Screw terminal up to 10Awg conductor diameter.

RECOMMENDED WIRING

18 Awg	up to 5 Amp total
16 Awg	up to 10 Amp total
12 Awg	up to 20 Amp total
10 Awg	up to 40 Amp total




VARIETY OF SCENES

MODE:	COMMAND:	COLORS:
SUNSET	SUNSET	AMBER, GOLD, & RGB WHITE
TRANQUILITY	OCEAN	BLUE, LIGHT BLUE, & LIGHT GREEN
MORNING SKY	SKYLIGHT	BLUE AND RGB WHITE
ROMANCE	LOVE	RED AND PINK
ROYAL	ROYAL	PINK AND VIOLET
RAINBOW	RAINBOW	ALL - SLOW
MARDI GRAS	PARTY	ALL - MEDIUM
COOL CABARET	DISCO	ALL - FAST
USA	USA	BLUE, RED, AND WHITE
TWILIGHT	TWILIGHT	VIOLET AND BLUE



EP-RS232-PRO LED CONTROLLER

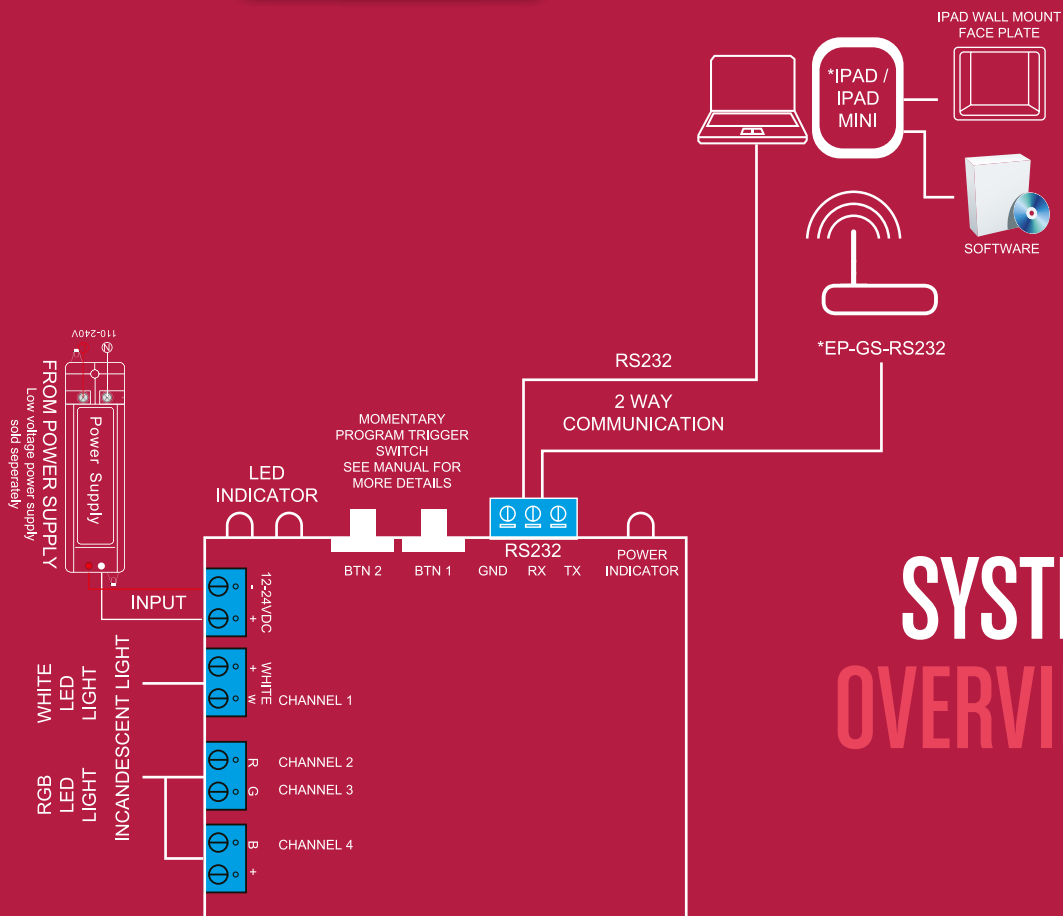

SYSTEM OVERVIEW